

HD Series Dump Trailers

Low Profile

6 X 10
10,000 Lbs.*


7 X 12
12,000 Lbs.

7 X 14
14,000 Lbs.

7 X 16
14,000 Lbs.

Deckover

6 X 10
7,000 Lbs.
10,000 Lbs.*

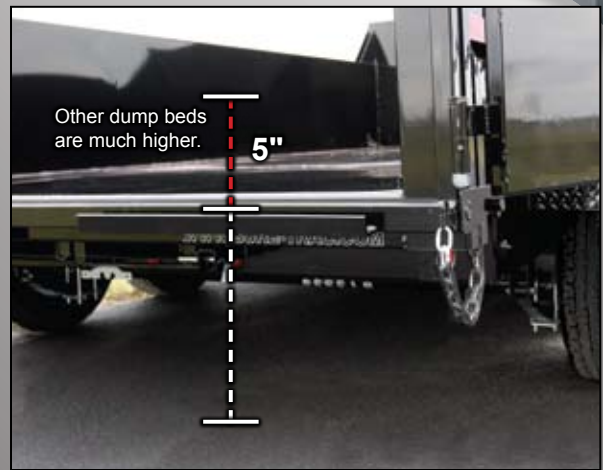

4" Drop Axles – Creates a superior loading angle for your equipment.

Shown with Optional Set Back Jack and Adjustable Coupler.

*Actual GVWR listed on spec sheet.

Sure-Trac HD Series Dump Trailers – Our most competitive dump trailer ever built is a smart combination of features, durability and value. These trailers have everything the hard working contractor is looking for in a package that is ready for your toughest jobs. We utilize heavy 11 gauge DuraSteel[™] construction with full seam welds in the bed for ultimate strength and product flow. These Heavy-Duty Dump trailers will provide years of reliable service.

Check out these other great features:

- Scissor Hoist is Optional on 10K & 12K
- Side Steps on Low Profile Units
- True-Trac[™] Alignment
- Easy Lube Hubs
- Powder Coated Finish
- Quality Crafted in Indiana
- Superior Customer Service
- Same Day Parts Shipping



Multi-Function Gate – Easily convert barn doors to spreader gate with **Heavy Duty, Single Handle Spreader Gate Latch**.



HD Ladder Ramps – Easy access 6.5 ft. ramps allow for smooth loading/unloading of equipment. **Stored underneath bed.**



Custom Pump/Battery Box – Lockable Self-latching custom box and long-lasting marine battery. **Control Switch** operates lift up to 20 ft. away.



6 x 10 Deckover Dump – Perfect for the homeowner or light duty construction.



Spare Tire Holder – Securely attach a spare tire to the front of the trailer (Optional on 6 X 10 Deckover).



HD 3 ft. Bulk Head & Slat Holder – Drop in a 2 x 12 to easily increase the side height of your trailer.

Novae[®]
NovaeCorp.com

800-372-1755

HD SERIES DUMP TRAILER SPECIFICATIONS

	6 x 10 Deckover	6 x 10 Deckover	6 x 10 Low Profile	80" x 12 Low Profile	80" x 14 Low Profile	80" x 16 Low Profile
GVWR (Lbs.)	7000	9990	9990	12000	14000	14000
GAWR (Lbs./Axle)	3500	5000	5000	6000	7000	7000
Curb Weight	1820	1940	3200	3240	3600	3960
Payload	5180	8050	6790	8760	10400	10040
Max Hitch Wt.	700	1000	1000	1200	1400	1400
Frame	4 x 2 Tubing		5 x 2 Tubing		6 x 2 Tubing	
Crossmembers	4 x 2 Tube					
Tongue	A-Frame 4 x 2 Tube		A-Frame 5 x 2 Tube			
Sides	11 GA. 20"		11 GA. 24"			
Coupler	2-5/16" A-Frame Ball Coupler					
Jack	Coupler Mounted, 2000# Top Wind					
Fenders	N/A		Heavy Duty Treadplate			
Axles	Cambered Brake					
Suspension	Equalized Leaf Spring					
Tires	205/75D15 LRD	225/75D15 LRD	225/75D15 LRD	750-16LT LRF	235/80R16 LRE	
Wheels	5 on 4.5	15", 6 on 5.5	15", 6 on 5.5	16", 8 on 6.5		
	White, Spoke or Modular					
Floor	11 GA					
Lights	DOT Approved		Sealed Recessed DOT Lighting Side Markers Stop Turn Tail and Conspicuity Treatment			
Electric Plug	7 Way Round					
Finish	Powder Coated High Gloss Black					
Overall Length (in.)	159	159	174	198	222	246
Bed Length Inside (in.)	120	120	120	144	168	192
Bed Width Inside (in.)	71.5			80		
Bed Height Inside (in.)	16		20			
Floor Height (in.)	33		25			
Coupler Height (in.)	21		19			
Gate	Fold Down		2 Way Combination Spreader/Barn			
Hydraulic Hoist	Single Ram		Dual Ram			
Pump	2500 PSI 12VDC With Hydraulic Reservoir					
Battery	24 Group Deep Cycle Battery					
OPTIONS						
	6 x 10	6 x 10	6 x 10	80" x 12	80" x 14	80" x 16
Wheel Upgrades	225/75D15 LRD	ST225/75R15 LRD	ST225/75R15 LRD	235/80R16 LRE	N/A	
Spare Tire Option	Matching Tire and Rim					
Suspension	Slipper Leaf Spring					
Frame Add Ons	Mesh Tool Basket Built Into Tongue					
Coupler	2-5/16 Adjustable Ball Coupler					
Body Options	(5) 5000lb D-Rings Welded Into Bed (Standard on all Low Profiles)					
	Spare Tire Mount (Standard on all Low Profiles)					
Hoist	N/A		Scissor Hoist	Scissor Hoist	N/A	

Table Units: Weights in Lbs., Dimensions as marked. Specifications subject to change without notice.